



VideoEntry
APP




7" display



5" display



Handsfree
audio

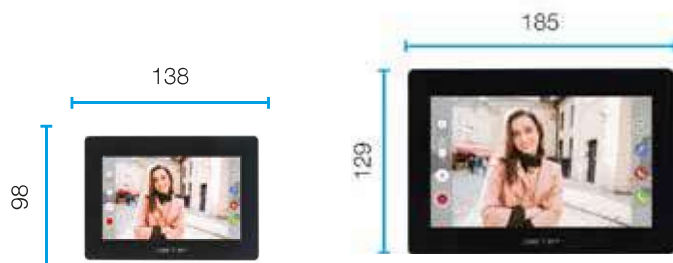

Recess-mounting
11 mm thick

Wall-mounting
24 mm thick

XTS is the video entry system with fully capacitive touch screen TFT display available in 7" and 5" versions. The minimalist design and the quality of the materials enhance its elegance.

The anti-reflective glass screen is equipped with OPTICAL BONDING technology that guarantees perfect viewing in all light conditions, as well as increased scratch and impact resistance.

It is provided with configurable quick commands, AUX for activation of auxiliary functions and a "Panic" button for emergency porter calls.

The version with integrated WIFI allows you to manage the system and open the door from your smartphone.

MAIN FEATURES

- Display with OPTICAL BONDING technology
- Unlimited intercom calls to other receivers and smartphones/tablets
- Integrated WIFI for remotely controlling calls over smartphones running the dedicated App (7" versions)
- Video answering service, stores up to 100, 10-second audio and video messages.
- Real-time display of IP camera images
- Audio and video recording during conversations
- Sending and receiving text messages from the porter
- Video self-connection of entry panels with cyclical selection
- Automatic opening function during business hours



118127 XTS 7IP WH WIFI

118758 XTS 7IP BK WIFI



PLUS

- Integrated WIFI for remotely controlling calls over smartphones using the dedicated App
- Up to 19 mobile devices for managing the system from any remote location
- Full-duplex handsfree audio
- PoE power supply
- Audio video settings: ringtone volume, display brightness, interface backgrounds
- Adjust/exclude ringtone, with indication LED when set to exclude mode
- Different melodies for call from entry panels or from landings
- Display lock function for easy cleaning
- Integrated web server for configuring and managing via the browser
- Contacts list and favorites list



118179 XTS 5IP WH

118759 XTS 5IP BK



PLUS

- Full-duplex handsfree audio
- PoE power supply
- Audio video settings: ringtone volume, display brightness, interface backgrounds
- Adjust/exclude ringtone, with indication LED when set to exclude mode
- Different melodies for call from entry panels or from landings
- Display lock function for easy cleaning
- Integrated web server for configuring and managing via the browser
- Contacts list and favorites list



TECHNICAL FEATURES

MODELS	XTS 7IP WH WIFI	XTS 7IP BK WIFI	XTS 5IP WH	XTS 5IP BK
Dimensions (mm)	185 x 129 x 24	185 x 129 x 24	138 x 98 x 24	138 x 98 x 24
Local power supply (V)	14 ÷ 18 DC	14 ÷ 18 DC	14 ÷ 18 DC	14 ÷ 18 DC
Local consumption (mA)	-	-	-	-
PoE power supply	IEEE 802.3af-PD	IEEE 802.3af-PD	IEEE 802.3af-PD	IEEE 802.3af-PD
Consumption in stand-by mode (mA)	340	340	270	270
Maximum consumption (mA)	420	420	330	330
Operating temperature (°C)	0 to +40	0 to +40	0 to +40	0 to +40
Protection rating (IP)	30	30	30	30
Video standard	H.264	H.264	H.264	H.264
Frequency (MHz)	2,412 - 2,472	2,412 - 2,472	-	-
Wireless Standard	IEEE 802.11b/g/n	IEEE 802.11b/g/n	-	-
Color	White	Black	White	Black