


IR Mini Dome CAMERA IP

KSV0013120.300

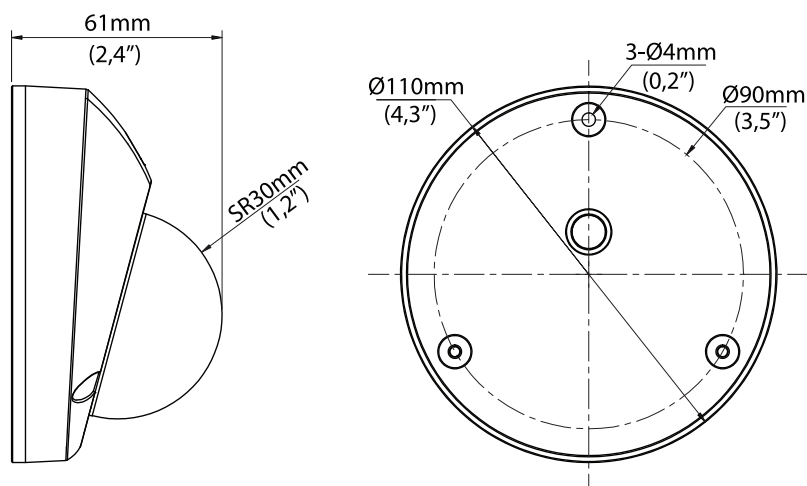

Ksenia
security innovation

DATASHEET

DESCRIPTION

Mini Dome is an IP video-surveillance camera for outdoor / indoor use with 2 MP CMOS sensor in HD with IP66 protection grade and day / night functionality, smart IR, IR distance up to 30m, optical glass lens with higher light transmission, anti-reflective IR lens which increases the transmittance of the infrared 3D DNR (Digital Noise Reduction) H.265, H.264, MJPEG Video format 9:16 IP67 in compliance with ONVIF protocol.

Mini Dome IP cameras, support the POE technology (IEEE 802.3af Class 3) that allows you to power the cameras directly via LAN cable without any external power supply.

TECHNICAL DATA

Sensor: 1/2.8", 2.0 Mpx, progressive scan, CMOS

Lens: 2.8mm

Angle of view (H): 115°

Shutter: Auto/Manual, 1/6 ~ 1/8000 s

Min. Illumination Colour: 0.02 Lux (F2.0, AGC ON)
0 Lux with IR on

Day/Night: IR-cut filter with auto switch (ICR)

IR Range: Up to 30m (98 ft) IR range

S/N: >52dB

Max. Resolution: 1920x1080

Video Compression: H.265/MJPEG

Frame Rate: 1080P (1920x1080): Max. 30 fps;
720P (1280x720): Max. 30 fps; D1 (720x576): Max.
25 fps

Video Streaming: Triple

ROI: Supported

OSD: Up to 8 OSDs

Privacy Mask: Up to 4 areas

Edge Storage: Micro SD, Up to 128 GB

Protocols: L2TP, IPv4, IGMP, ICMP, ARP, TCP,
UDP, DHCP, PPPoE, RTP, RTSP, DNS, DDNS, NTP,
FTP, UPnP, HTTP, HTTPS, SMTP, SNMP, SIP, QoS

Compatible, Integration: ONVIF, API

Audio I/O: audio cable

Input: impedance 35 kΩ; amplitude 2 V [p-p]

Output: impedance 600 Ω; amplitude 2 V [p-p]

Built-in Mic: supported

Network: 10M/100M Base-TX Ethernet

Power: 12 V DC, or PoE (IEEE 802.3 af)

Power consumption: 3~5W

Dimensions: Ø110 x 61 mm (Ø4.3" x 2.4")

Weight: 0.25 kg (0.55 lb)

Working Environment: -35° C ~ +60° C (-31° F ~
140° F)

Humidity: 95% RH (non-condensing)

Ingress Protection: IP66



DATASHEET

HOW TO ORDER

KSV0013120.300

PARTS INCLUDED

1- IR Mini Dome camera IP
1- Installation manual IT-EN



DATASHEET

